

MaxxFan Lid Replacement Instructions



A

With the MaxxFan in the open position, remove the four 3/4 inch by #10 screws that hold the MaxxFan to the Roof Receiving Flange.




B

Carefully raise the MaxxFan off the Roof Receiving Flange.




C

Remove the two rear hinge screws.

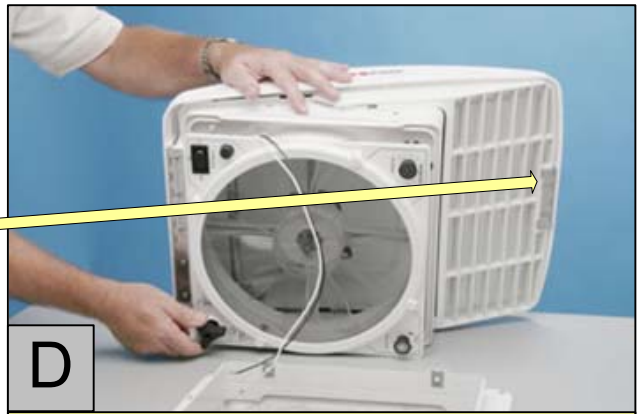

D

Continue to open the MaxxFan and release the Lifting Arms from the two Upper Brackets. Ref. Photos 'E' and 'F'.

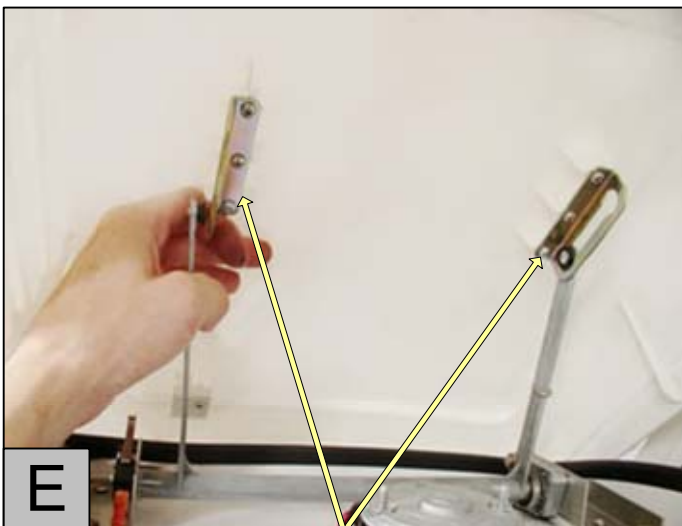


E

Upper Brackets




F

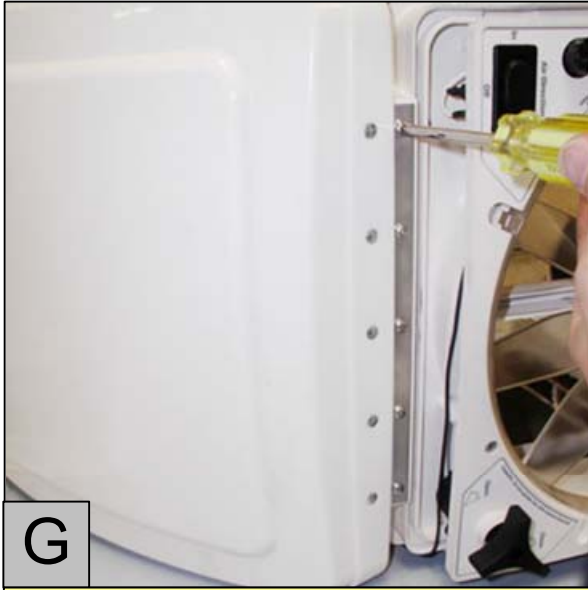


G

With the MaxxFan turned to the side, remove the five Hinge Screws. Ref. Photos 'H' and 'I'.

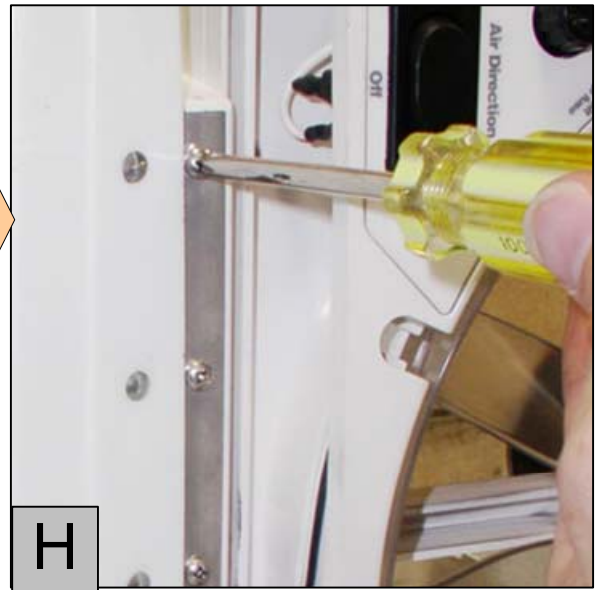

H

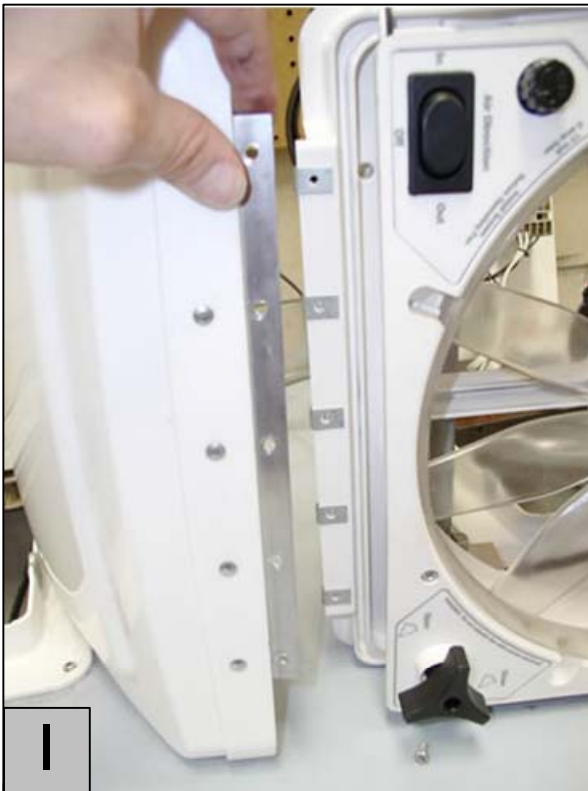


I

The Vent Cover is now removed.

CAUTION



Smoke Lid Hinge Spacer

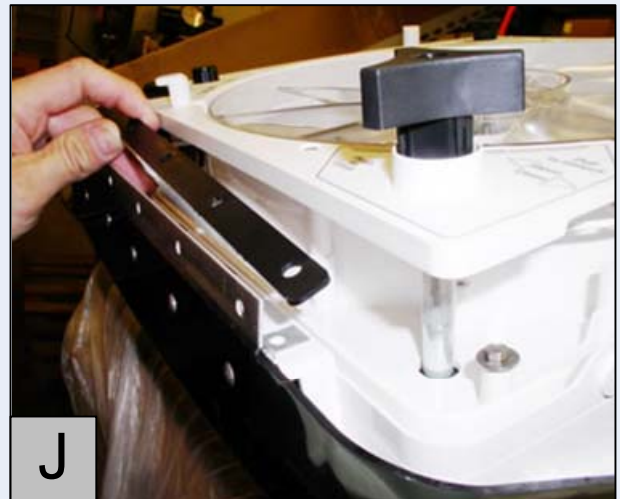


J

If you are replacing the MaxxFan with a Smoke Vent Lid; a Hinge Spacer is Required. White Vent Lid Covers do not require a spacer. Ref. Photos 'K' and 'L'.



K

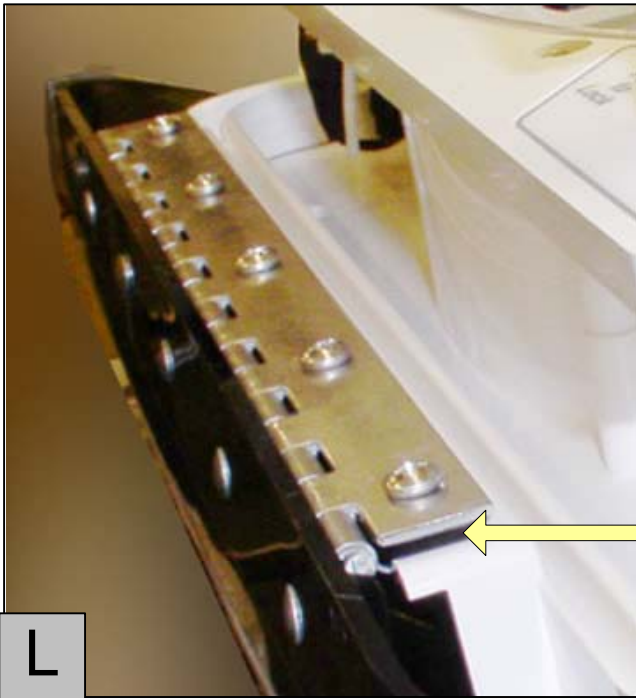

L

Hinge Spacer, Smoke Lids Only.